


CENTERFIRE PISTOL & REVOLVER AMMUNITION BALLISTICS

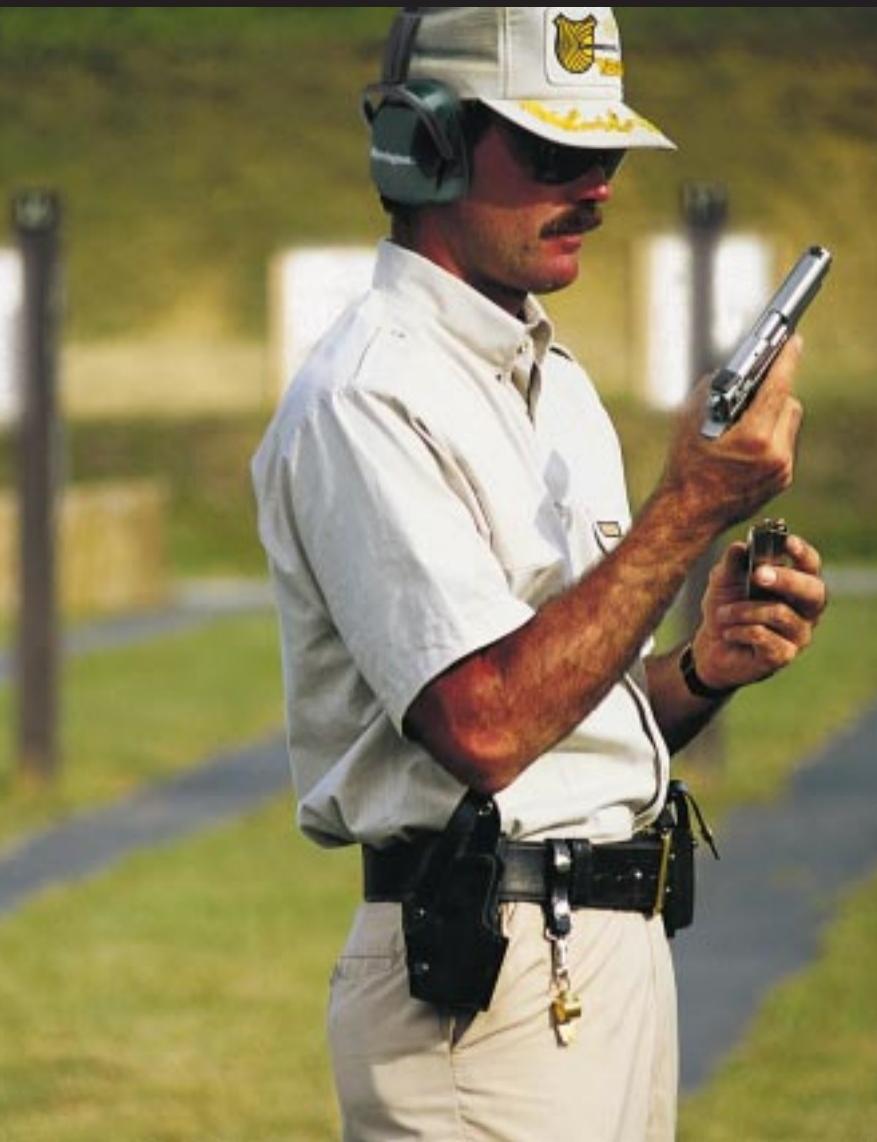

Golden Saber™

Core-Lokt® Hunting

Disintegrator™ Frangible

Caliber	Order No.	Primer No.	Weight (grs.)	Bullet Style	Velocity (ft./sec.)		Energy (ft.-lbs.)		Mid-range Trajectory			
					Muzzle	50 yds.	100 yds.	Muzzle	50 yds.	100 yds.	B.L.	
.25 (6.35mm) Auto. Pistol	R25AP	1½	50	Metal Case	760	707	659	64	56	48	20"	8.7" 2"
.32 S&W	R32SW	1½	88	Lead	680	645	610	90	81	73	2.5"	10.5" 3"
.32 S&W Long	R32SWL	1½	98	Lead	705	670	635	115	98	88	2.3"	10.5" 4"
.32 (7.65mm) Auto. Pistol	R32AP	1½	71	Metal Case	905	855	810	129	115	97	1.4"	5.8" 4"
.357 Mag. (Vented Barrel Ballistics)	R357M7	5½	110	Semi-Jacketed Hollow Point	1295	1094	975	410	292	232	0.8"	3.5" 4"
	R357M1	5½	125	Semi-Jacketed Hollow Point	1450	1240	1090	583	427	330	0.6"	2.8" 4"
	GS357MA	5½	125	Brass-Jacketed Hollow Point	1220	1095	1009	413	333	283	0.8"	3.5" 4"
	RH357MA	5½	165	JHP Core-Lokt®	1290	1189	1108	610	518	450	0.7"	3.1" 8 ¾"
	R357M2	5½	158	Semi-Jacketed Hollow Point	1235	1104	1015	535	428	361	0.8"	3.5" 4"
	R357M3	5½	158	Soft Point	1235	1104	1015	535	428	361	0.8"	3.5" 4"
	R357M5	5½	158	Semi-Wadcutter	1235	1104	1015	535	428	361	0.8"	3.5" 4"
	R357M10	5½	180	Semi-Jacketed Hollow Point	1145	1053	985	524	443	388	0.9"	3.9" 8 ¾"
9mm Luger Auto. Pistol	R9MM1	1½	115	Jacketed Hollow Point	1155	1047	971	341	280	241	0.9"	3.9" 4"
	R9MM10	1½	124	Jacketed Hollow Point	1120	1028	960	346	291	254	1.0"	4.1" 4"
	R9MM2	1½	124	Metal Case	1110	1030	971	339	292	259	1.0"	4.1" 4"
	R9MM3	1½	115	Metal Case	1135	1041	973	329	277	242	0.9"	4.0" 4"
	R9MM6	1½	115	Jacketed Hollow Point (+P)‡	1250	1113	1019	399	316	265	0.8"	3.5" 4"
	R9MM8	1½	147	Jacketed Hollow Point (Subsonic)	990	941	900	320	289	264	1.1"	4.9" 4"
	R9MM9	1½	147	Metal Case (Match)	990	941	900	320	289	264	1.1"	4.9" 4"
	LF9MMA	1½	101	Disintegrator™ Plated Frangible	1220	1092	1004	334	267	226	0.9"	3.6" 4"
	GS9MMB	1½	124	Brass-Jacketed Hollow Point	1125	1031	963	349	293	255	1.0"	4.0" 4"
	GS9MMC	1½	147	Brass-Jacketed Hollow Point	990	941	900	320	289	264	1.1"	4.9" 4"
	GS9MMD	1½	124	Brass-Jacketed Hollow Point (+P)‡	1180	1089	1021	384	327	287	0.8"	3.8" 4"
.380 Auto. Pistol	R380AP	1½	95	Metal Case	955	865	785	190	160	130	1.4"	5.9" 4"
	R380A1	1½	88	Jacketed Hollow Point	990	920	868	191	165	146	1.2"	5.1" 4"
	GS380B	1½	102	Brass-Jacketed Hollow Point	940	901	866	200	184	170	1.2"	5.1" 4"
.38 S&W	R38SW	1½	146	Lead	685	650	620	150	135	125	2.4"	10.0" 4"
.38 Special (Vented Barrel Ballistics)	R38S10	1½	110	Semi-Jacketed Hollow Point (+P)‡	995	926	871	242	210	185	1.2"	5.1" 4"
	R38S16	1½	110	Semi-Jacketed Hollow Point	950	890	840	220	194	172	1.4"	5.4" 4"
	R38S2	1½	125	Semi-Jacketed Hollow Point (+P)‡	945	898	858	248	224	204	1.3"	5.4" 4"
	GS38SB	1½	125	Brass-Jacketed Hollow Point (+P)‡	975	929	885	264	238	218	1.0"	5.2" 4"
	R38S3	1½	148	Targetmaster® Lead WC Match	710	634	566	166	132	105	2.4"	10.8" 4"
	R38S5	1½	158	Lead (Round Nose)	755	723	692	200	183	168	2.0"	8.3" 4"
	R38S14	1½	158	Semi-Wadcutter (+P)‡	890	855	823	278	257	238	1.4"	6.0" 4"
	R38S6	1½	158	Semi-Wadcutter	755	723	692	200	183	168	2.0"	8.3" 4"
	R38S12	1½	158	Lead Hollow Point (+P)‡	890	855	823	278	257	238	1.4"	6.0" 4"
.38 Short Colt	R38SC	1½	125	Lead	730	685	645	150	130	115	2.2"	9.4" 6"
.357 Sig.	R357S1	5½	125	Jacketed Hollow Point	1350	1157	1032	506	372	296	0.7"	3.2" 4"
.40 S&W	R40SW1	5½	155	Jacketed Hollow Point	1205	1095	1017	499	413	356	0.8"	3.6" 4"
	R40SW2	5½	180	Jacketed Hollow Point	1015	960	914	412	368	334	1.3"	4.5" 4"
	LF40SWA	5½	141	Disintegrator™ Plated Frangible	1135	1056	996	403	349	311	0.9"	3.9" 4"
	GS40SWA	5½	165	Brass-Jacketed Hollow Point	1150	1040	964	485	396	340	1.0"	4.0" 4"
	GS40SWB	5½	180	Brass-Jacketed Hollow Point	1015	960	914	412	368	334	1.3"	4.5" 4"
.41 Rem. Mag. (Vented BBL Ballistics)	R41MG1	2½	210	Soft Point	1300	1162	1062	788	630	526	0.7"	3.2" 4"
.44 Rem. Mag. (Vented BBL Ballistics)	R44MG5	2½	180	Semi-Jacketed Hollow Point	1610	1365	1175	1036	745	551	0.5"	2.3" 4"
	R44MG2	2½	240	Soft Point	1180	1081	1010	741	623	543	0.9"	3.7" 4"
	R44MG3	2½	240	Semi-Jacketed Hollow Point	1180	1081	1010	741	623	543	0.9"	3.7" 4"
	RH44MGA	2½	275	JHP Core-Lokt®	1235	1142	1070	931	797	699	0.8"	3.3" 6 ½"
.44 S&W Special	R44SW	2½	246	Lead	755	725	695	310	285	265	2.0"	8.3" 6"
.45 Colt	R45C	2½	250	Lead	860	820	780	410	375	340	1.6"	6.6" 5"
	R45C1	2½	225	Semi-Wadcutter	960	890	832	460	395	346	1.3"	5.5" 5"
.45 Auto.	R45AP2	2½	185	Jacketed Hollow Point	1000	939	889	411	362	324	1.1"	4.9" 5"
	R45AP4	2½	230	Metal Case	835	800	767	356	326	300	1.6"	6.8" 5"
	R45AP7	2½	230	Jacketed Hollow Point (Subsonic)	835	800	767	356	326	300	1.6"	6.8" 5"
	LF45APA	2½	175	Disintegrator™ Plated Frangible	1020	923	851	404	331	281	1.2"	5.1" 5"
	GS45APA	2½	185	Brass-Jacketed Hollow Point	1015	951	899	423	372	332	1.1"	4.5" 5"
	GS45APB	2½	230	Brass-Jacketed Hollow Point	875	833	795	391	355	323	1.5"	6.1" 5"
	GS45APC	2½	185	Brass-Jacketed Hollow Point (+P)‡	1140	1042	971	534	446	388	1.0"	4.0" 5"

†Ammunition with (+P) on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.